



SUMMARY

CY8CTMA1036/768/460

Automotive TrueTouch[®] Multi-Touch All-Points Touchscreen Controller

Features

- **Automotive Electronics Council (AEC) Q100 qualified**
- **Multi-touch capacitive touchscreen and touchpad controller**
 - 32-bit ARM Cortex CPU
 - Register configurable
 - Noise suppression technologies for display and EMI
 - On-chip 10-V TX supply for higher signal-to-noise ratio (SNR)
 - External display synchronization
 - Water rejection and wet finger tracking
 - Large object rejection
 - Automatic baseline tracking to environmental changes
 - Low-power look-for-touch mode
 - Field upgrades via bootloader
 - Android™ driver support
 - Cypress manufacturing test kit (MTK)
 - Touchscreen sensor self-test and ID reporting
- **System performance**
 - Screen sizes up to 10.1-inch diagonal
 - 5.5-mm sensor pitch, 4:3 aspect ratio
 - Up to 65 sense pins
 - 1036 intersections, 4:3 aspect ratio (37 × 28)
 - Reports up to 10 fingers
 - Small finger support down to 5 mm
 - Large finger support up to 22 mm
 - Refresh rate up to 80 Hz; other rates configurable
 - Fast first-touch response (≤ 37.5 ms for a 10.1-inch panel)
- **Power (configuration dependent)**
 - 1.71-V to 5.5-V digital and I/O supply
 - 2.60-V to 5.5-V analog supply
 - 71-mW average power while sensing
 - 45- μ W typical deep-sleep power
- **Sensor and system design (configuration dependent)**
 - Supports a variety of touchscreen sensors and stackups
 - Manhattan and diamond patterns
 - Sensor-on-lens (SOL)
 - Plastic (PET) and glass sensor substrates
 - LCD and AMOLED displays
 - Single on cell flexible printed circuit (FPC) routing enabled by flexible TX/RX configurations
- **I²C and SPI interface options**
 - I²C slave at all standard bit rates
 - 100 kbps, 400 kbps, 1 Mbps, and 3.4 Mbps
 - SPI slave bit rates up to 8 Mbps
- **Package options**
 - 100-pin TQFP, 14 × 14 × 1.4 mm, 0.5-mm pin-pitch
- **Temperature ranges**
 - Automotive-A: -40 °C to 85 °C
 - Automotive-S: -40 °C to 105 °C


Ordering Information

Table 1 lists the CY8CTMA1036/768/460 TrueTouch touchscreen controllers. For information on other TrueTouch families, visit <http://www.cypress.com/truetouch>.

Table 1. Device Ordering Information

Family	Marketing Part Number	Number of Sense Pins	Number of fingers	Capsense Buttons	Water Rejection	Object Detect and Reject	Glove Support	Gestures	10-V TX	External Display Sync	Package	Package Size	Silicon ID
Low cost	CY8CTMA460AA-13	48	10	✓	✓	✓	✓	-	-	-	100 TQFP	14 × 14 × 1.4 mm	0x01832390
	CY8CTMA460AS-13	48	10	✓	✓	✓	✓	-	-	-	100 TQFP	14 × 14 × 1.4 mm	0x01842390
	CY8CTMA768AA-13	56	10	✓	✓	✓	✓	-	-	-	100 TQFP	14 × 14 × 1.4 mm	0x01752390
	CY8CTMA768AS-13	56	10	✓	✓	✓	✓	-	-	-	100 TQFP	14 × 14 × 1.4 mm	0x01762390
	CY8CTMA1036AA-13	65	10	✓	✓	✓	✓	-	-	-	100 TQFP	14 × 14 × 1.4 mm	0x01772390
	CY8CTMA1036AS-13	65	10	✓	✓	✓	✓	-	-	-	100 TQFP	14 × 14 × 1.4 mm	0x01782390
Gestures	CY8CTMA460AA-23	48	10	✓	✓	✓	✓	✓	-	-	100 TQFP	14 × 14 × 1.4 mm	0x01852390
	CY8CTMA460AS-23	48	10	✓	✓	✓	✓	✓	-	-	100 TQFP	14 × 14 × 1.4 mm	0x01862390
	CY8CTMA768AA-23	56	10	✓	✓	✓	✓	✓	-	-	100 TQFP	14 × 14 × 1.4 mm	0x01792390
	CY8CTMA768AS-23	56	10	✓	✓	✓	✓	✓	-	-	100 TQFP	14 × 14 × 1.4 mm	0x017A2390
	CY8CTMA1036AA-23	65	10	✓	✓	✓	✓	✓	-	-	100 TQFP	14 × 14 × 1.4 mm	0x017B2390
	CY8CTMA1036AS-23	65	10	✓	✓	✓	✓	✓	-	-	100 TQFP	14 × 14 × 1.4 mm	0x017C2390
Base	CY8CTMA460AA-33	48	10	✓	✓	✓	✓	✓	✓	✓	100 TQFP	14 × 14 × 1.4 mm	0x01872390
	CY8CTMA460AS-33	48	10	✓	✓	✓	✓	✓	✓	✓	100 TQFP	14 × 14 × 1.4 mm	0x01882390
	CY8CTMA768AA-33	56	10	✓	✓	✓	✓	✓	✓	✓	100 TQFP	14 × 14 × 1.4 mm	0x017D2390
	CY8CTMA768AS-33	56	10	✓	✓	✓	✓	✓	✓	✓	100 TQFP	14 × 14 × 1.4 mm	0x017E2390
	CY8CTMA1036AA-33	65	10	✓	✓	✓	✓	✓	✓	✓	100 TQFP	14 × 14 × 1.4 mm	0x017F2390
	CY8CTMA1036AS-33	65	10	✓	✓	✓	✓	✓	✓	✓	100 TQFP	14 × 14 × 1.4 mm	0x01802390
Custom	CY8CTMA1036AA-00	65	10	✓	✓	✓	✓	✓	✓	✓	100 TQFP	14 × 14 × 1.4 mm	0x01812390
	CY8CTMA1036AS-00	65	10	✓	✓	✓	✓	✓	✓	✓	100 TQFP	14 × 14 × 1.4 mm	0x01822390

Ordering Code Definitions

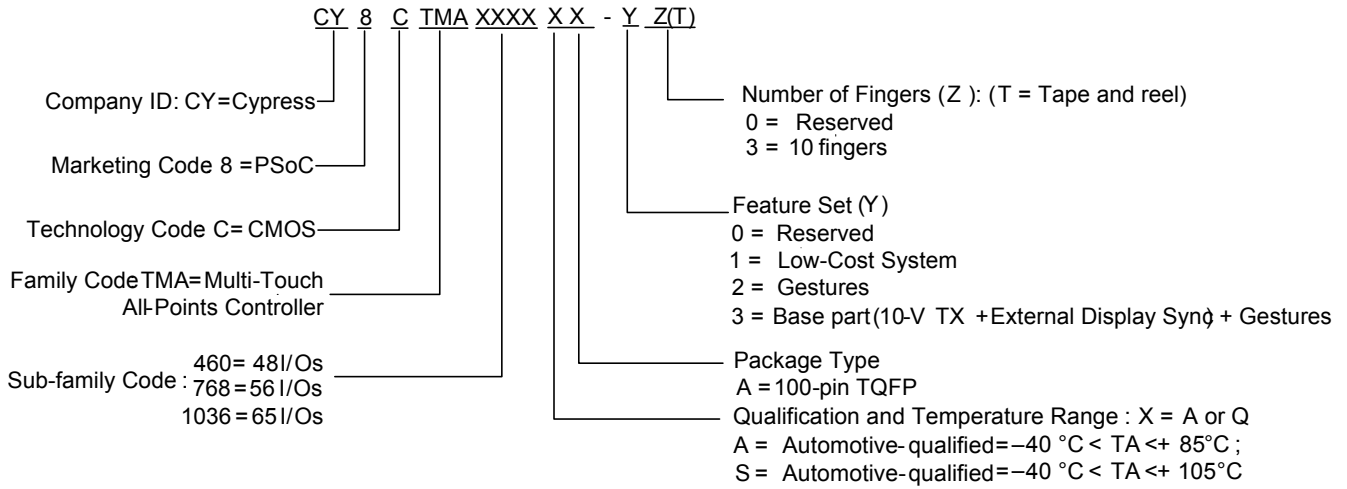

Document History Page

Document Title: CY8CTMA1036/768/460 Automotive TrueTouch® Multi-Touch All-Points Touchscreen Controller				
Document Number: 001-94115				
Revision	ECN	Orig. of Change	Submission Date	Description of Change
**	4495966	KAUL	09/09/2014	New summary datasheet.

Sales, Solutions, and Legal Information

Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer’s representatives, and distributors. To find the office closest to you, visit us at [Cypress Locations](#).

Products

- Automotive cypress.com/go/automotive
- Clocks & Buffers cypress.com/go/clocks
- Interface cypress.com/go/interface
- Lighting & Power Control cypress.com/go/powerpsoc
cypress.com/go/plc
- Memory cypress.com/go/memory
- PSoC cypress.com/go/psoc
- Touch Sensing cypress.com/go/touch
- USB Controllers cypress.com/go/USB
- Wireless/RF cypress.com/go/wireless

PSoC® Solutions

- psoc.cypress.com/solutions
- PSoC 1 | PSoC 3 | PSoC 4 | PSoC 5LP

Cypress Developer Community

- [Community](#) | [Forums](#) | [Blogs](#) | [Video](#) | [Training](#)

Technical Support

- cypress.com/go/support

© Cypress Semiconductor Corporation, 2014. The information contained herein is subject to change without notice. Cypress Semiconductor Corporation assumes no responsibility for the use of any circuitry other than circuitry embodied in a Cypress product. Nor does it convey or imply any license under patent or other rights. Cypress products are not warranted nor intended to be used for medical, life support, life saving, critical control, or safety applications, unless pursuant to an express written agreement with Cypress. Furthermore, Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress products in life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Any Source Code (software and/or firmware) is owned by Cypress Semiconductor Corporation (Cypress) and is protected by and subject to worldwide patent protection (United States and foreign), United States copyright laws and international treaty provisions. Cypress hereby grants to licensee a personal, non-exclusive, non-transferable license to copy, use, modify, create derivative works of, and compile the Cypress Source Code and derivative works for the sole purpose of creating custom software and or firmware in support of licensee product to be used only in conjunction with a Cypress integrated circuit as specified in the applicable agreement. Any reproduction, modification, translation, compilation, or representation of this Source Code except as specified above is prohibited without the express written permission of Cypress.

Disclaimer: CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Cypress reserves the right to make changes without further notice to the materials described herein. Cypress does not assume any liability arising out of the application or use of any product or circuit described herein. Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress’ product in a life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Use may be limited by and subject to the applicable Cypress software license agreement.