


NOTES: UNLESS OTHERWISE SPECIFIED

- P/N: X100WCOLOR  
HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.  
AVAILABLE IN TEN COLORS.  
CONTACT BLADE: BERYLLIUM COPPER PER QQ-C-533. GOLD PLATED PER MIL-G-45204 B TYPE 1 0.00001 [0.000254] THICK MINIMUM.  
SPRING: STAINLESS STEEL TYPE 302.

- P/N: 9275COLOR  
INSULATOR: MOLDED PVC. AVAILABLE IN TEN COLORS.  
ALLIGATOR: STEEL. NICKEL PLATED.

- P/N: W-200/COLOR  
22AWG 65X40 TINNED COPPER  
0.070 [1.78] O.D. PVC INSULATION  
AVAILABLE IN TEN COLORS.

- PERFORMANCE  
MAXIMUM CURRENT: 2.5 AMPS  
MAXIMUM VOLTAGE: 1000 (300 UL) W.V.D.C.  
MAXIMUM TEMPERATURE: 221°F (105°C)

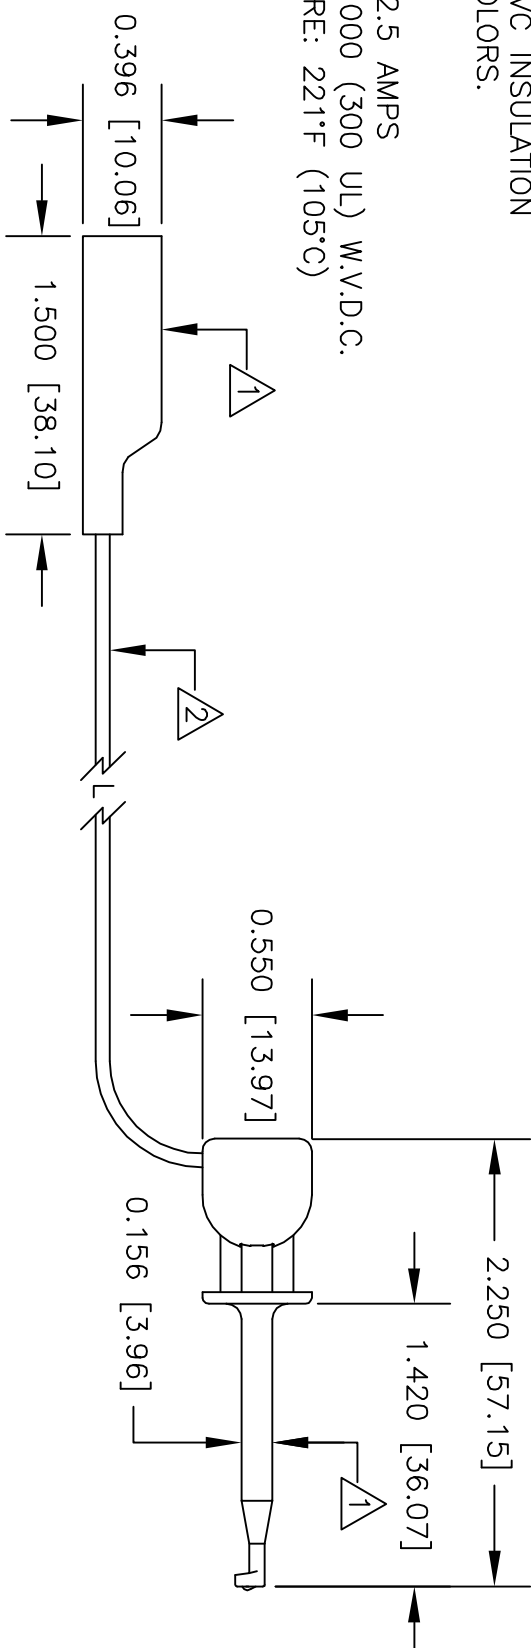

LTR	REVISIONS	DESCRIPTION	DATE	APPROVED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.		DESCRIPTION		
± .XX ±	± .XXX ±	APPROVALS	DATE	<b>E-Z-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A. MINI-HOOK (X100W) TO MINI ALLIGATOR (9275)		
MATERIAL SEE NOTE.		DRAWN	R.L.			10/10
FINISH SEE NOTE.		APPROVED BY				
APPLICATION	USED ON	DO NOT SCALE DRAWING		SIZE	CODE IDENT NO. DRAWING NO.	
				A	08505 229W	
				SCALE	1:1	
				SHEET	1 OF 1	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK. DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.