
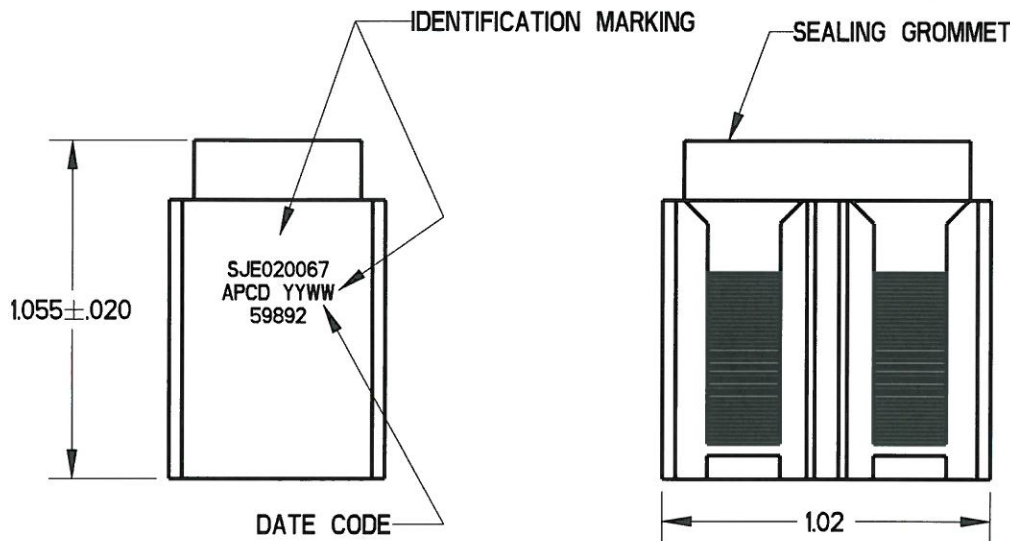
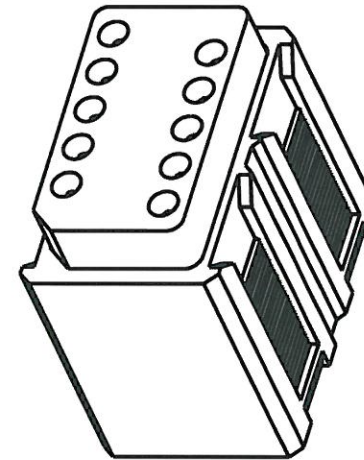


REV	ECN	APP'D
-	6519	JT 4/15/10



**NOTES:**

- MATERIALS:**  
 BODY: POLYETHERIMIDE PER ASTM-D5205.  
 GROMMET: SILICONE BLEND ELASTOMER.  
 RESISTOR: 56.2KΩ, RNC55H5622FS, POWER RATING:  
 1/8W @ 70 °C, 1/10W @ 125 °C. QTY: 5.  
 INTERNAL PIN CONTACT:  
 COPPER ALLOY, HARD GOLD PLATE PER MIL-DTL-45204.
- PERFORMANCE SPECIFICATION PER SAE-AS8174.**  
 (SUBJECT TO LIMITATIONS OF THE ELECTRONIC COMPONENTS)  
 TEMPERATURE: -65 °C TO 200 °C.  
 INSULATION RESISTANCE: 5000 MEGOHMS MIN AT 25 °C.  
 DIELECTRIC WITHSTANDING VOLTAGE:  
 1500 VRMS AT SEA LEVEL,  
 AND 200 VRMS AT 100,000 FT. ALTITUDE.  
 CURRENT RATING: 7.5A FOR SIZE 20 CONTACTS.  
 VIBRATION AND SHOCK: PER SAE-AS8174 PARA 3.5.8 & 9.
- MODULE ACCEPTS SOCKET CONTACTS (10) M39029/22-192.
- MODULE TO BE MOUNTED ON M81714/67 RAIL SYSTEM.

<b>DIMENSIONS</b> ANSI Y14.5M UNITS: INCHES Pro/E FILE	<b>TOLERANCES</b> .XX ±0.01 .XXX ±0.005 ANGLES ±1.0°	<b>PROJECTION</b> 	<b>Amphenol Pcd</b> SPECIFICATION DRAWING			<b>TITLE</b> SJE SERIES ELECTRONIC MODULE (5) 56.2KΩ, RNC55H5622FS		
			ENGR M. DiGIACOMO 3/29/10			<b>SIZE</b> A	<b>DWG NO.</b> SJE020067	
<b>ORIGINAL</b> 			THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD BEVERLY, MA, USA			CHKD <i>Rid Neuman 4/15/10</i>		APPD <i>Jalut 4/15/10</i>
			CODE: 58982		SCALE: 1.667		SHEET 1 OF 1	